

Fig. 1

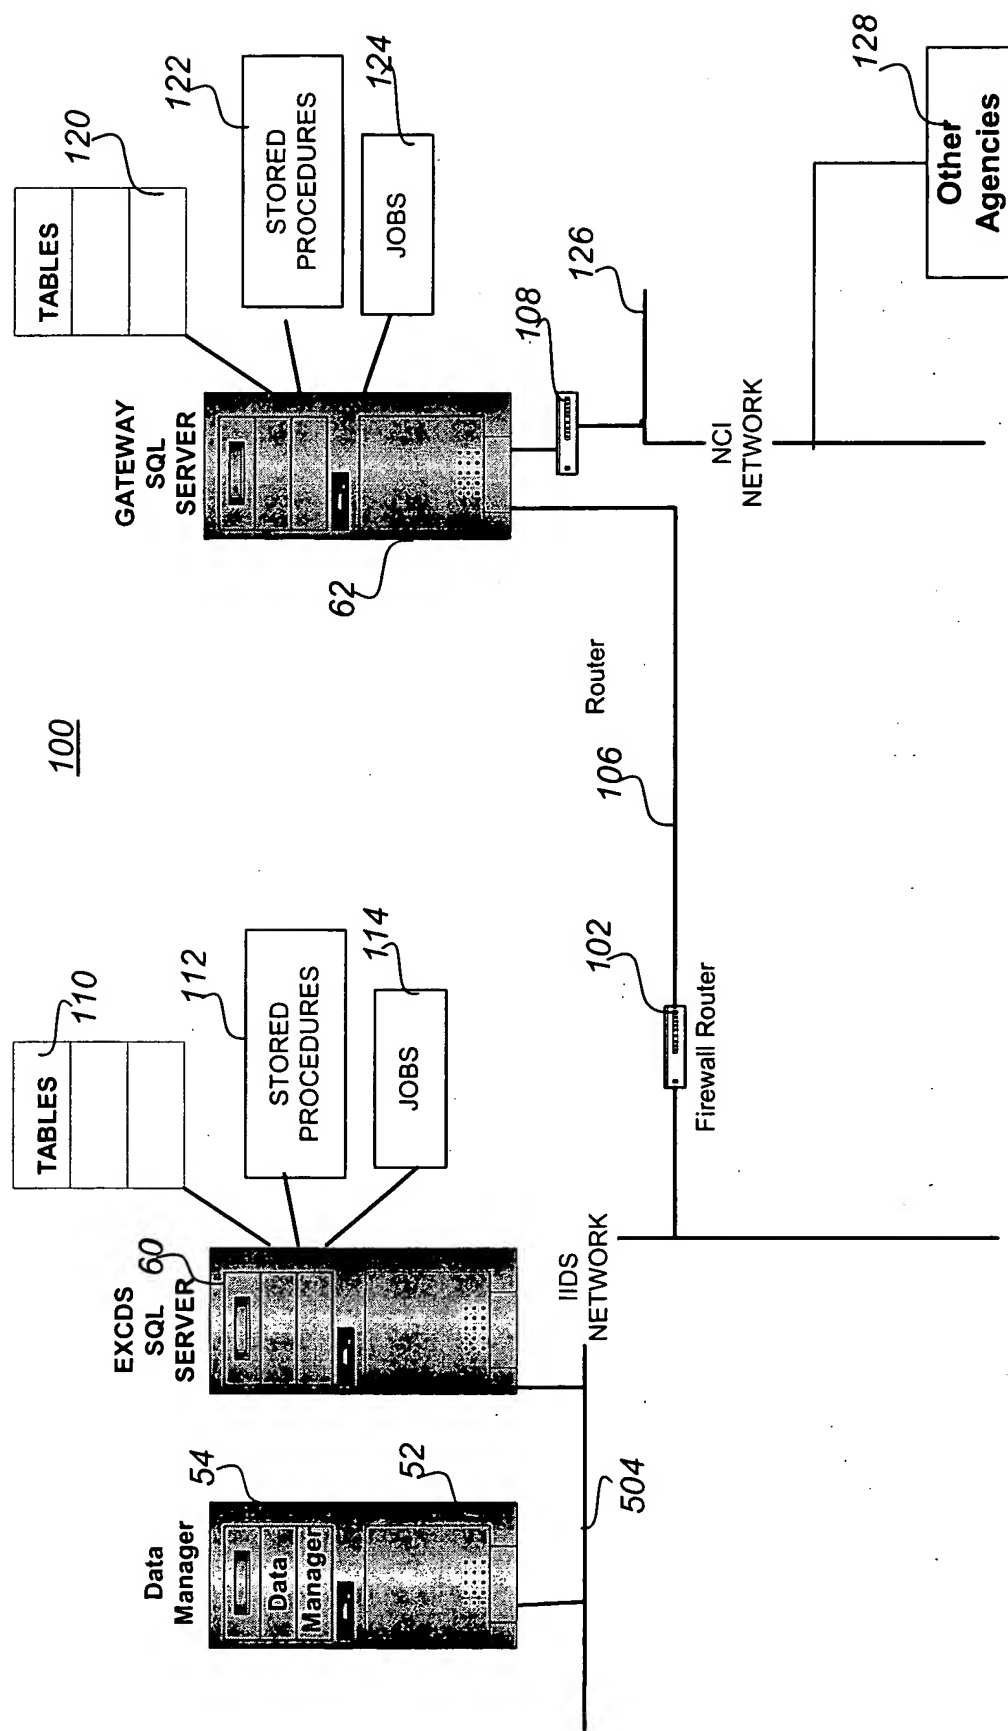


Fig. 2

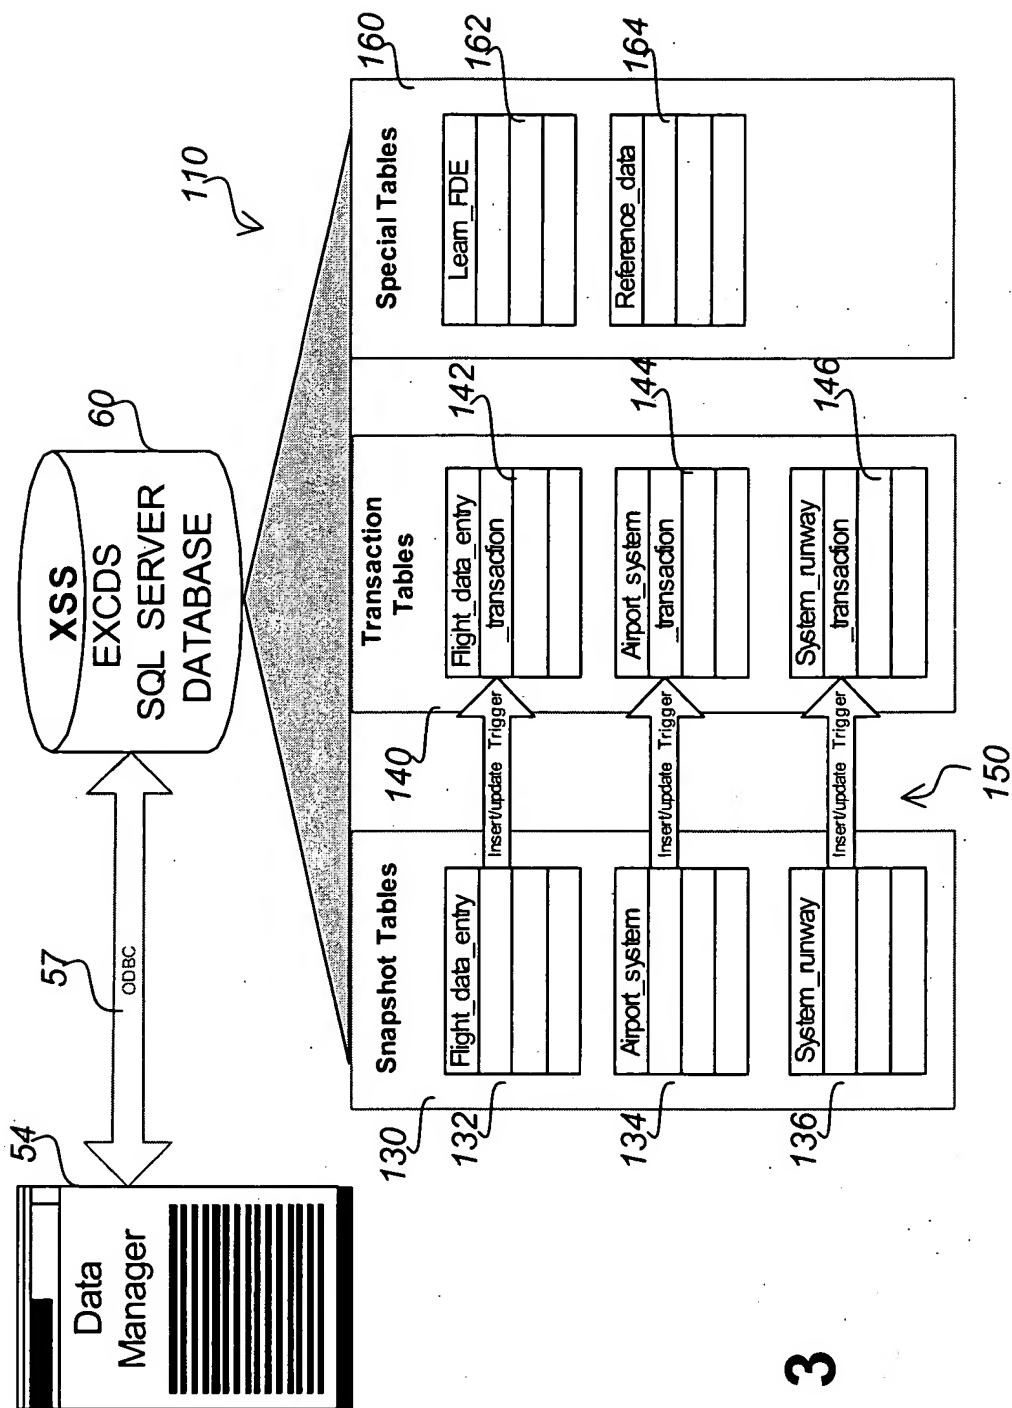


Fig. 3

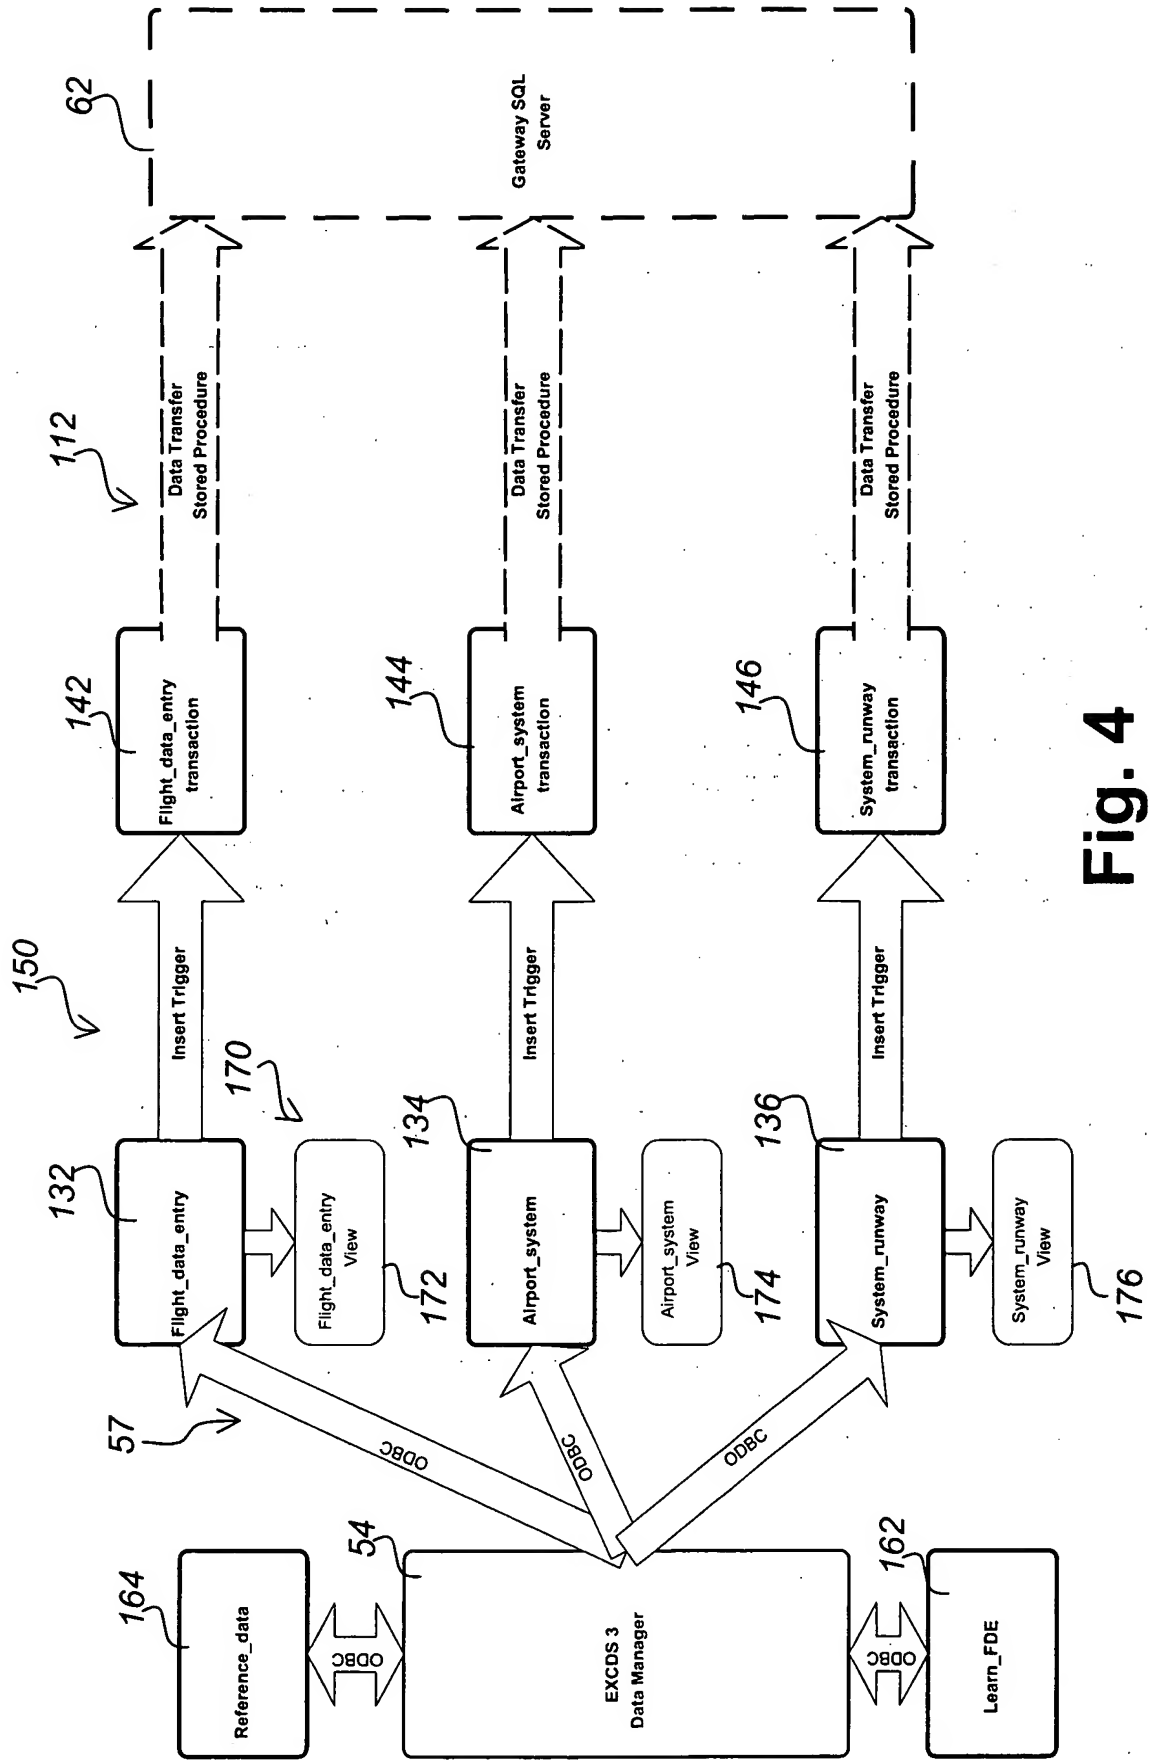


Fig. 4

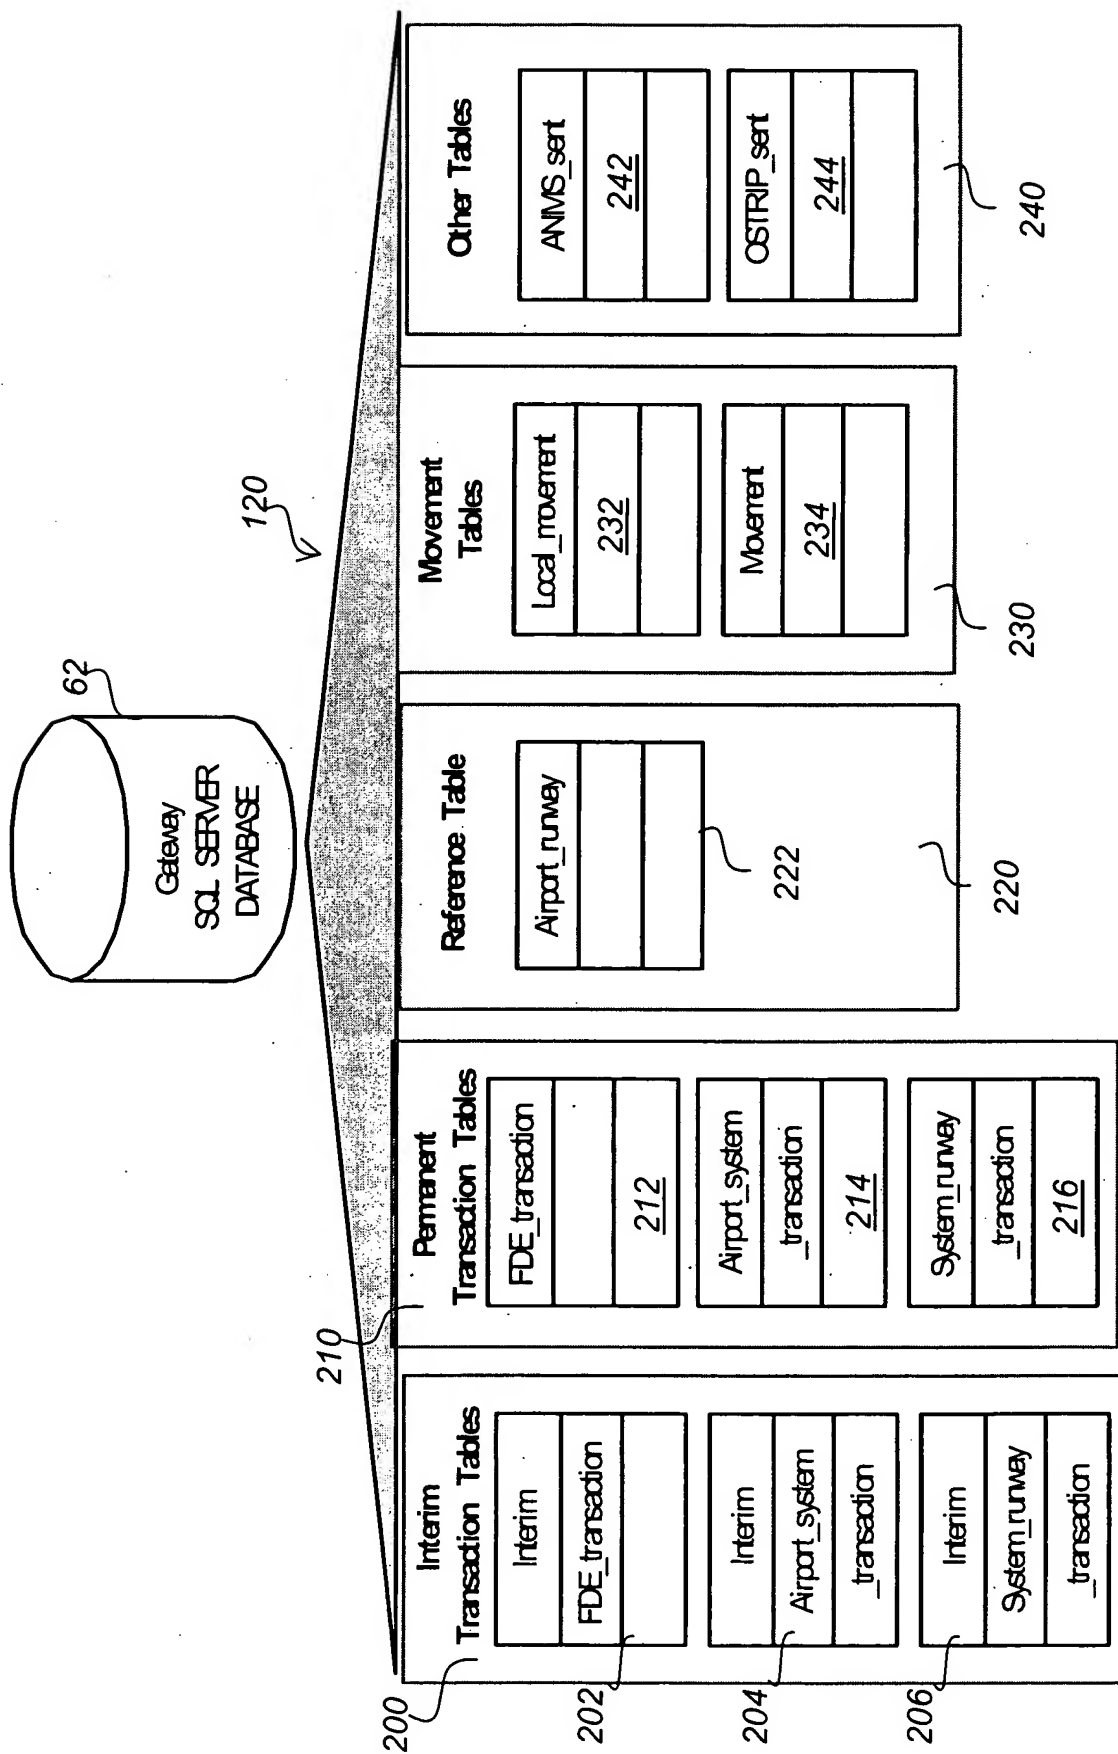


Fig. 5

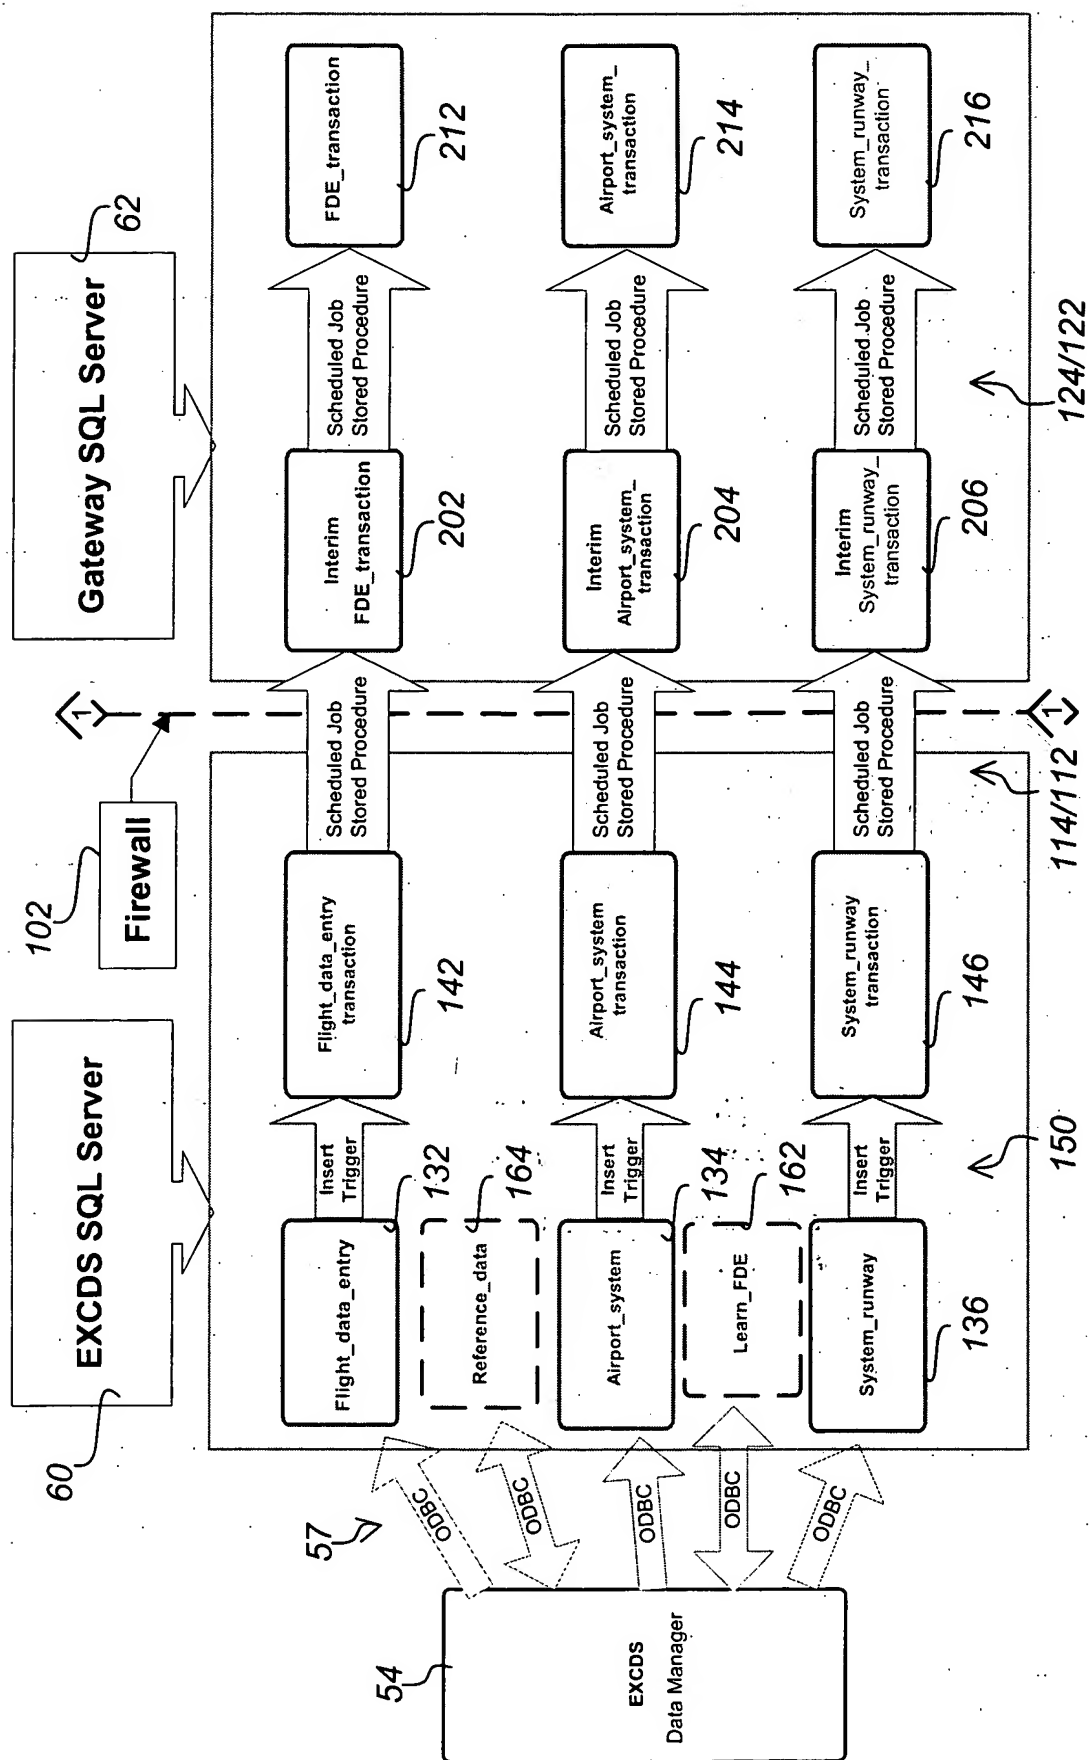


Fig. 6

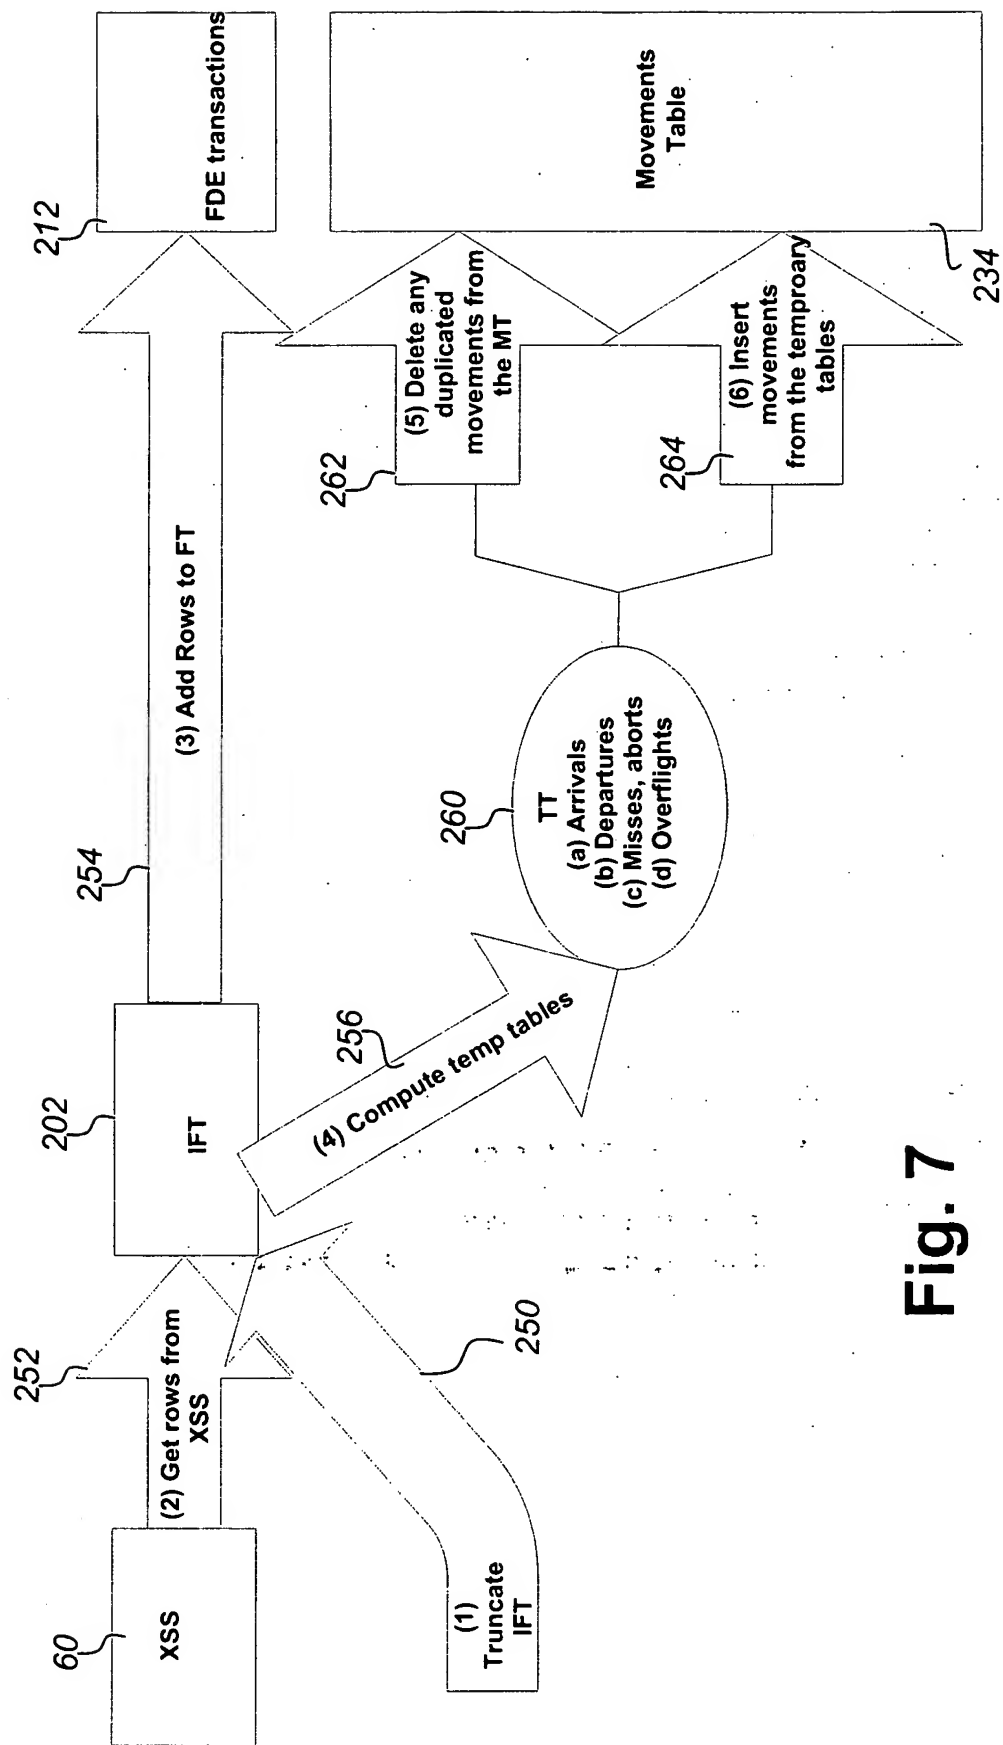


Fig. 7

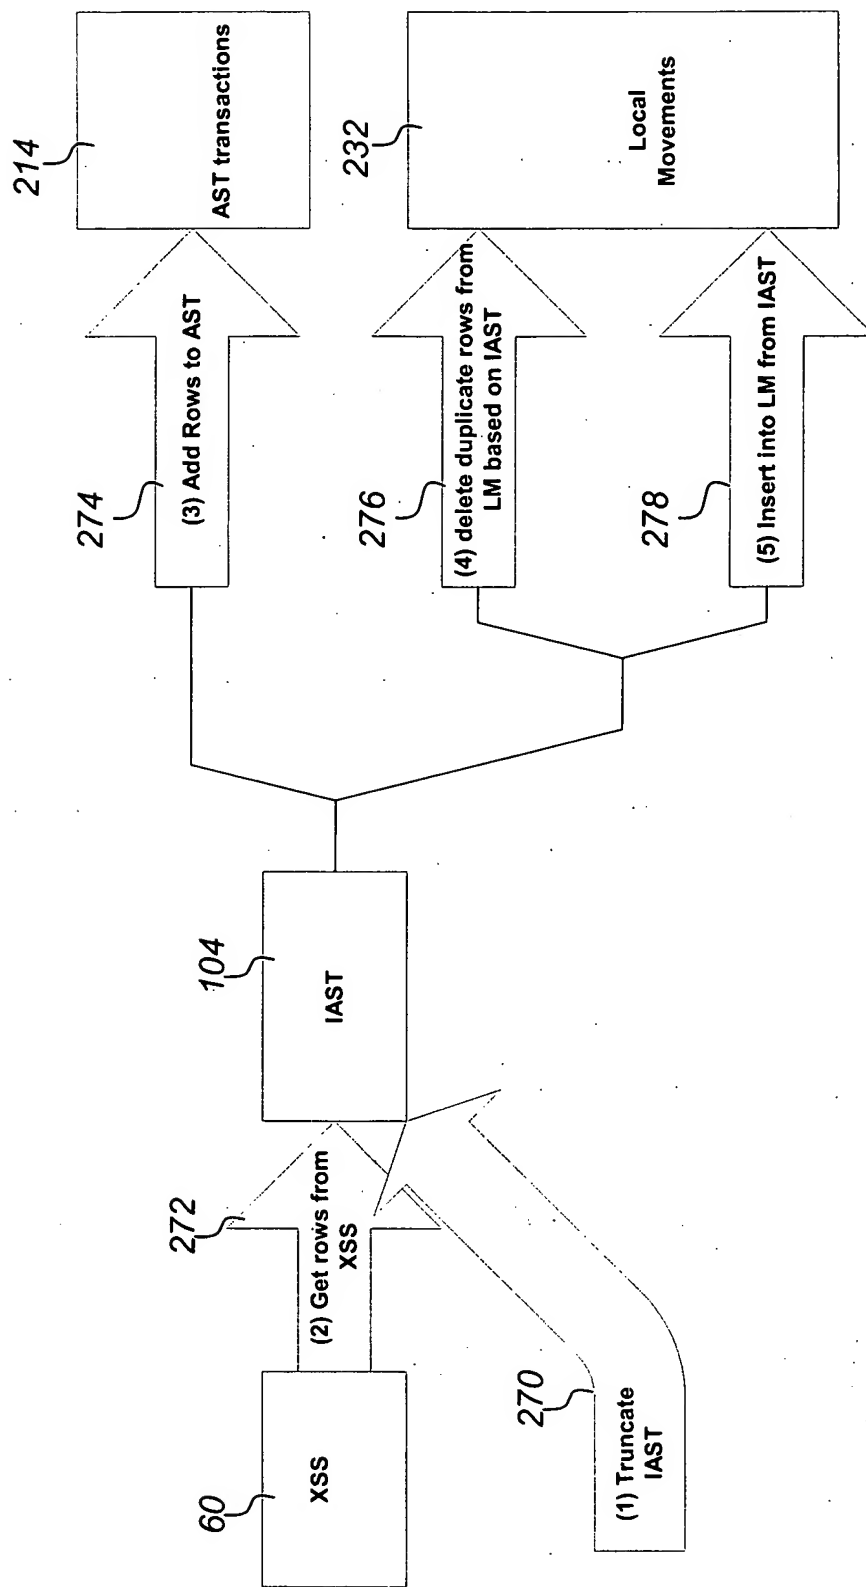


Fig. 8

Query - SERVER_C.EXCDS.DSC - (untitled) - dsc_help

dsc_help

EXCDS DSC Stored Procedures

Name & Parameters	Description	Default Parameter
dsc_statecount	Count of rows by state (*)	Current values
dsc_tables	Row and page counts for EXCDS tables (#)	Current values
dsc_trace1 <acid>	Selected FDE items (*)	Last 4 hours
dsc_trace2 <acid>[,<from>[,<to>]]	Transactions for specified acid & period	Last hour
dsc_trace3 <from>[,<to>]	All transactions for specified period	Last 4 hours
dsc_trace4 <machine>[,<from>[,<to>]]	Tower activity for specified machine & period	Last 4 hours
dsc_trace5 <acid>[,<from>[,<to>]]	Tower activity for specified acid & period	Last 4 hours
dsc_movement	Arrival and departure movements from adapted airports (#)	
	- acid	All
	- aircraft type	All
	- departure airport	All
	- destination airport	All
	- actual time of departure start time span	All
	- actual time of departure end time span	All
	- actual time of arrival start time span	All
	- actual time of arrival end time span	All
	- departure runway	All
	- arrival runway	All
	- flight rules	All
	- magic bits	All

<acid> may be specified in full (no quotes necessary) e.g. ACA123 or using wildcards in quotes e.g. "ACA_".
The underscore (_) represents any character and the percent sign (%) represents any string.

Parameters may be specified by position (as shown above) or by name prefixed by the @ symbol, e.g. @deprwy=33R

Dates (<from> and <to>) are specified in quotes in the form "mon dd yyyy hh:mm", e.g. "Feb 1 1999 00:00".

(*) - these Stored Procedures are present on the EXCDS SQL Server only
(#) - these Stored Procedures are present on the Gateway SQL server only

Results / Query batch completed: 0 rows / Elapsed time: 0:00:00

Fig. 9